


C21

METALIZED POLYCARBONATE



LEAD LENGTH = 1.5" MIN.

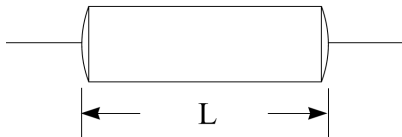

Axial Lead

ROUND

Wrap & Fill

Lead Gauge	50VDC	100VDC	200VDC	400VDC
24AWG	.001 - 2.0	.001 - 1.0	.001 - .33	.001 - .10
22AWG	3.0 - 8.0	1.2 - 3.0	.39 - 1.2	.12 - .27
20AWG	10.0 - 20.0	4.0 - 20.0	1.5 - 10.0	.33 - 2.0

MFD	50 VDC			100 VDC			200 VDC			400 VDC		
	D +.05	L +.05	PART NO.	D +.05	L +.05	PART NO.	D +.05	L +.05	PART NO.	D +.05	L +.05	PART NO.
.0010	.15	.40	C21A102	.15	.40	C21B102	.15	.40	C21C102	.15	.40	C21E102
.0012	.15	.40	C21A122	.15	.40	C21B122	.15	.40	C21C122	.15	.40	C21E122
.0015	.15	.40	C21A152	.15	.40	C21B152	.15	.40	C21C152	.15	.40	C21E152
.0018	.15	.40	C21A182	.15	.40	C21B182	.15	.40	C21C182	.15	.40	C21E182
.0022	.15	.40	C21A222	.15	.40	C21B222	.15	.40	C21C222	.15	.40	C21E222
.0027	.15	.40	C21A272	.15	.40	C21B272	.15	.40	C21C272	.15	.40	C21E272
.0033	.15	.40	C21A332	.15	.40	C21B332	.15	.40	C21C332	.15	.40	C21E332
.0039	.15	.40	C21A392	.15	.40	C21B392	.15	.40	C21C392	.16	.40	C21E392
.0047	.15	.40	C21A472	.15	.40	C21B472	.15	.40	C21C472	.17	.40	C21E472
.0056	.15	.40	C21A562	.15	.40	C21B562	.15	.40	C21C562	.15	.53	C21E562
.0068	.15	.40	C21A682	.15	.40	C21B682	.15	.40	C21C682	.15	.53	C21E682
.0082	.15	.40	C21A822	.15	.40	C21B822	.15	.40	C21C822	.15	.53	C21E822
.010	.15	.40	C21A103	.15	.40	C21B103	.15	.40	C21C103	.17	.53	C21E103
.012	.15	.40	C21A123	.15	.40	C21B123	.15	.40	C21C123	.18	.53	C21E123
.015	.15	.40	C21A153	.15	.40	C21B153	.15	.40	C21C153	.20	.53	C21E153
.018	.15	.40	C21A183	.15	.40	C21B183	.16	.40	C21C183	.22	.53	C21E183
.022	.15	.40	C21A223	.15	.40	C21B223	.17	.40	C21C223	.24	.53	C21E223
.027	.15	.40	C21A273	.15	.40	C21B273	.15	.53	C21C273	.27	.53	C21E273
.033	.15	.40	C21A333	.15	.40	C21B333	.15	.53	C21C333	.29	.53	C21E333
.039	.15	.40	C21A393	.15	.40	C21B393	.16	.53	C21C393	.25	.68	C21E393
.047	.15	.40	C21A473	.15	.40	C21B473	.17	.53	C21C473	.27	.68	C21E473
.056	.15	.40	C21A563	.16	.40	C21B563	.19	.53	C21C563	.30	.68	C21E563
.068	.15	.40	C21A683	.18	.40	C21B683	.21	.53	C21C683	.28	.78	C21E683
.082	.15	.40	C21A823	.15	.53	C21B823	.22	.53	C21C823	.31	.78	C21E823
.10	.15	.40	C21A104	.16	.53	C21B104	.24	.53	C21C104	.34	.78	C21E104
.12	.15	.40	C21A124	.17	.53	C21B124	.27	.53	C21C124	.37	.78	C21E124
.15	.16	.40	C21A154	.19	.53	C21B154	.29	.53	C21C154	.35	.95	C21E154
.18	.15	.53	C21A184	.20	.53	C21B184	.27	.68	C21C184	.40	.95	C21E184
.22	.15	.53	C21A224	.22	.53	C21B224	.29	.68	C21C224	.38	1.17	C21E224
.27	.16	.53	C21A274	.24	.53	C21B274	.30	.78	C21C274	.42	1.17	C21E274
.33	.18	.53	C21A334	.26	.53	C21B334	.33	.78	C21C334	.46	1.17	C21E334
.39	.19	.53	C21A394	.29	.53	C21B394	.36	.78	C21C394	.50	1.17	C21E394
.47	.20	.53	C21A474	.26	.68	C21B474	.39	.78	C21C474	.54	1.17	C21E474
.56	.22	.53	C21A564	.29	.68	C21B564	.38	.95	C21C564	.59	1.17	C21E564
.68	.24	.53	C21A684	.29	.78	C21B684	.36	1.17	C21C684	.57	1.45	C21E684
.82	.26	.53	C21A824	.31	.78	C21B824	.39	1.17	C21C824	.57	1.70	C21E824
1.0	.28	.53	C21A105	.34	.78	C21B105	.43	1.17	C21C105	.57	1.95	C21E105
1.2	.26	.68	C21A125	.37	.78	C21B125	.46	1.17	C21C125	.63	1.95	C21E125
1.5	.28	.68	C21A155	.37	.95	C21B155	.52	1.17	C21C155	.70	1.95	C21E155
1.8	.29	.78	C21A185	.40	.95	C21B185	.56	1.17	C21C185	.76	1.95	C21E185
2.0	.30	.78	C21A205	.38	1.17	C21B205	.59	1.17	C21C205	.81	1.95	C21E205
3.0	.37	.78	C21A305	.45	1.17	C21B305	.57	1.70	C21C305			
4.0	.37	.95	C21A405	.52	1.17	C21B405	.60	1.95	C21C405			
5.0	.36	1.17	C21A505	.58	1.17	C21B505	.67	1.95	C21C505			
6.0	.39	1.17	C21A605	.62	1.17	C21B605	.73	1.95	C21C605			
8.0	.45	1.17	C21A805	.63	1.45	C21B805	.85	1.95	C21C805			
10.0	.50	1.17	C21A106	.64	1.70	C21B106	.94	1.95	C21C106			
12.0	.54	1.17	C21A126	.65	1.95	C21B126						
15.0	.60	1.17	C21A156	.72	1.95	C21B156						
18.0	.58	1.45	C21A186	.78	1.95	C21B186						
20.0	.61	1.45	C21A206	.82	1.95	C21B206						

Add letter to the end of the part number to specify the tolerance.

±20% = M ±5% = J ±2% = G
±10% = K ±3% = H ±1% = F



Bishop Electronics Corporation

3729 San Gabriel River Parkway • Pico Rivera CA 90660
 (562) 695-0446 (562) 692-9391 FAX : (562) 692-4008
 email: Sales@bishopelectronics.com